

06/30/00
JCS37 U.S. PTO

Please type a plus sign (+) inside this box



07-03-00

PTO/SB/05 (4/98)
Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

042390.P8721

First Inventor or Application Identifier

Aly Aarestrup Michaelson

Title

METHOD AND APPARATUS FOR FLEXIBLE HIGH SPEED

Express Mail Label No.

EL414991465US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 27]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages 3]
 - a. ☐ Newly executed (original copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO - 1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ *Small Entity ☐ Statement filed in prior application, Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:

Prior application Information: Examiner: _____ Group/Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number of Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP

Address

12400 Wilshire Boulevard, Seventh Floor

City

Los Angeles

State

California

Zip Code

90025

Country

U.S.A.

Telephone

(503) 684-6200

Fax

(503) 684-3245

Name (Print/Type)

Robert A. Diehl, Reg. No. 40,992

Signature

Robert A. Diehl

Date

06/30/00

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Our Ref.: 042390.P8721

APPLICATION FOR UNITED STATES LETTERS PATENT

FOR

**METHOD AND APPARATUS FOR FLEXIBLE HIGH SPEED
COMMUNICATION**

Inventor(s): Aly A. Michaelsen

Prepared by:

BLAKELY SOKOLOFF TAYLOR & ZAFMAN, LLP
12400 Wilshire Boulevard, 7th Floor
Los Angeles, California 90025
(503) 684-6200

METHOD AND APPARATUS FOR FLEXIBLE HIGH SPEED COMMUNICATION

FIELD OF THE INVENTION

The present invention pertains to the field of electronic devices. More
5 particularly, this invention relates network communications.

BACKGROUND

As more computer devices are networked, communication between the
computer devices have become faster. Faster communication involve transmitting and
10 receiving larger amounts of data signals between networked computer devices. Often,
these data signals are divided into packets for communication onto a network by a data
communication platform. The packets usually contain information relating to the
handling and managing of the data signals. Handling and managing of the data signals
may include information such as destination, origin, and other details of how to handle
15 the data signals.

Standards have been developed and included in the packets to allow the data
communication platform to handle and manage data signals in a predetermined
manner. There are a great number of these standards, known as protocols. However,
due to increasing complexity of networked computer devices, new protocols are
20 continually being developed.

The protocols may be developed and implemented in software, thereby allowing
the protocols to be less related to particular networked computer devices and more
universal. Additionally, protocols developed and implemented in software allow for

flexibility in developing and adding new protocols as needed by more complex networked computer devices.

The protocols may also be developed and implemented in hardware. For example, the protocols may be developed and implemented using application specific integrated circuits (ASICs). Because ASICs are designed in hardware for a specific purpose, they do not need to retrieve and execute stored instructions. As a result, ASICs usually provide faster, but less flexible, data signal communication between networked computer devices as compared to protocols developed and implemented in software.

Even though protocols developed and implemented in ASICs provide faster data signal communication between networked computer devices as compared to protocols developed and implemented in software, the time required for manufacture and the inflexibility of ASICs lead some to utilize protocols developed and implemented in software for data communication between networked devices, which provides slower, but more flexible, data communication.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not by way of limitation in the figures of the accompanying drawings, in which the like references indicate similar elements and in which:

5 **Figure 1** illustrates a block diagram of one embodiment of the present invention for utilizing both protocols developed and implemented in ASICs to provide fast data signal communication capabilities and protocols developed and implemented in software to provide flexibility in developing and adding new protocols as need by more complex networked computer devices;

10 **Figure 2** illustrates a block diagram of the first data communication platform and the second data communication platform coupled to provide fast and flexible data signal communication between networked computer devices in accordance with one embodiment of the present invention;

15 **Figure 3** illustrates an operational flow of one embodiment of the present invention; and

Figure 4 illustrates graphical representations of comparing relative performance time lines of the first data communication platform, the second data communication platform, and the combinations of the two types of data communication platforms

20 **Figure 5** illustrates a computer system upon which an embodiment of the present invention can be implemented.

DETAILED DESCRIPTION OF THE INVENTION

In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, those skilled in the art will understand that the present invention may be practiced without
5 these specific details, that the present invention is not limited to the depicted embodiments, and that the present invention may be practiced in a variety of alternate embodiments. In other instances, well known methods, procedures, components, and circuits have not been described in detail.

Parts of the description will be presented using terminology commonly employed
10 by those skilled in the art to convey the substance of their work to others skilled in the art. Also, parts of the description will be presented in terms of operations performed through the execution of programming instructions. As well understood by those skilled in the art, these operations often take the form of electrical, magnetic, or optical signals capable of being stored, transferred, combined, and otherwise manipulated through, for
15 instance, electrical components.

Various operations will be described as multiple discrete steps performed in turn in a manner that is helpful in understanding the present invention. However, the order of description should not be construed as to imply that these operations are necessarily performed in the order they are presented, or even order dependent. Lastly, repeated
20 usage of the phrase "in one embodiment" does not necessarily refer to the same embodiment, although it may.

As discussed more fully below, the present invention provides a way to utilize protocols developed and implemented in application specific integrated circuits (ASICs)

providing faster data signal communication between networked computer devices along with protocols developed and implemented in software providing faster and more flexible updating of protocols.

In general, embodiments of the present invention combine fast data signal communication capabilities of protocols developed and implemented in ASICs with the flexibility in developing and adding new protocols developed and implemented in software as needed by more complex networked computer devices.

Figure 1 illustrates a block diagram of one embodiment of the present invention for utilizing both protocols developed and implemented in ASICs to provide fast data signal communication capabilities and protocols developed and implemented in software to provide flexibility in developing and adding new protocols as need by more complex networked computer devices. In **Fig. 1**, a first data communication platform **110** and a second data communication platform **140** are shown. In the one embodiment of **Fig. 1**, the first data communication platform **110** may be a network processor utilizing protocols developed and implemented in software allowing for flexibility in developing and adding new protocols. Also in the one embodiment, the second data communication platform **140** may be a network switch engine utilizing protocols developed and implemented in ASICs providing faster, but less flexible, data signal communication as compared to protocols developed and implemented in software.

The first data communication platform **110** is connected to a network **170** through network data communication ports **120** and **125**, and from the network **170** to networked computer devices (not shown). Commonly, the network data communication

ports **120** and **125** transmit and receive data signals formatted according to a data communication protocol from the network **170**. The network data communication ports **120** and **125** further transmit and receive data signals from the first data communication platform **110** through a bus **115**.

5 The second data communication platform **140** is also connected to the network **170** through network data communication ports **145** and **150**, and from the network **170** to networked computer devices (not shown). Commonly, the network data communication ports **145** and **150** may transmit and receive data signals from the second data communication platform **140** directly for transmission and reception of data signals formatted according to a data communication protocol from the network **170**.

10 Shown in **Fig. 1**, an interface connection **160** couples the first data communication platform **110** with the second data communication platform **140** in accordance with one embodiment of the present invention. The interface connection **160** couples the first data communication platform **110** with the second data communication platform **140** through the data communication port **125** of the first data communication platform **110** and the data communication port **145** of the second data communication platform **140**. However, it should be appreciated by one skilled in the art that the interface connection **160** may be of any type of interface connection known in the art such as but not limited to a data communication bus between the first data communication platform **110** and the second data communication platform **140**.

 It should be appreciated by one skilled in the art that the first data communication platform **110** may be utilized to communicate between networked computer devices (not shown) without being coupled to the second data communication

platform **140**. However, since the first data communication platform utilizes protocols developed and implemented in software allowing for flexibility in developing and adding new protocols, the first data communication platform **110** is slower in data signal communication as compared to the second data communication platform **140**.

5 Also, it should be appreciated by one skilled in the art that the second data communication platform **140** may also be utilized to communicate between networked computer devices (not shown) without being coupled to the first data communication platform **140**. However, since the second data communication platform **140** incorporates protocols developed and implemented in ASICs providing faster data
10 signal communication between networked computer devices as compared to protocols developed and implemented as software, the second data communication platform **140** is less flexible in updating protocols as compared to the first data communication platform.

15 In one embodiment, the first data communication platform **110** and the second data communication platform **140** may be combined on a single integrated circuit board (not shown). In one embodiment, the first data communication platform **110** and the second data communication platform **140** may be on separate integrated circuit boards (not shown). In one embodiment, multiple second data communication platforms are arranged in a stacked configuration with the first data communication platform interface
20 connected to the stack. A variety of alternate arrangements of the first and second data communication platforms are possible.

As will be discussed in further detail below, the interface connection **160**, in accordance with one embodiment of the present invention, couples the first data

communication platform **110** and the second data communication platform **140** to combine protocols developed and implemented in ASICs, providing fast data signal communication capabilities, with protocols developed and implemented in software, providing flexibility in developing and adding new protocols as needed by more complex networked computer devices.

Figure 2 illustrates more detail of one embodiment of the first data communication platform and the second data communication platform coupled to provide fast and flexible data signal communication between networked computer devices.

The first data communication platform **110** of **Fig. 2** includes, among other components (not shown), a memory **210** and a processor **230**. The processor **230** may be a complex instruction set computer (CISC) microprocessor, a reduced instruction set computing (RISC) microprocessor, a very long instruction word (VLIW) microprocessor, a processor implementing a combination of instruction sets, or other processor device.

The memory **210** may be a dynamic random access memory (DRAM) device, a synchronous direct random access memory (SDRAM) device, a Flash memory device, or other memory device. The memory **210** may store instructions and code represented by data signals that may be executed by the processor **230**. Additionally, the memory may also store data communication protocols and instructions for supporting the communication protocols.

In **Fig. 2**, the second data communication platform **140** includes, among other components (not shown), a "look-up table" **250**, a filter engine **260**, and a by-pass path **270** of the filter engine **260**. The filter engine **260** filters data signals by comparing

received data signals formatted according to data communication protocols to data communication protocols stored in the “look-up table” **250** and determining if the data signals are formatted according to a data communication protocol that the second data communication platform **140** can support. Stored in the “look-up table” **250** may be data communication protocols and instructions for supporting the data communication protocols by the second data communication platform **140**. The manner in which filters perform the filtering functions are known in the art, and therefore, need not be discussed in further detail.

The by-pass path **270** is an electronic path through the filter engine **260**, where a signal will be routed through the filter engine **260** without being processed by the filter engine **260**. Data signals are routed through the by-pass path **270**, by-passing the filter engine **260**, when an indication to do so is received by the second data communication platform **140**. Once the data signals are received and routed through the by-pass path **270** of the filter engine **260** according to one embodiment of the present invention, the data signals are received by other components (not shown) of the second data communication platform, and then, processed and transmitted out of the second data communication platform by methods known in the art.

Additionally, shown in **Fig. 2**, the second data communication platform includes a filter path **275** of the filter engine **260**. By routing data signals through the filter path **275**, the filter engine **260** filters data signals by comparing received data signals formatted according to data communication protocols to the data communication protocols stored in the “look-up table” **250** and determining if the data signals are formatted according to a data communication protocol that the second data

communication platform **140** can support. The manner in which the data signals are filtered may be in any manners known in the art, and when the data signals are received and routed through the filter path **275** of the filter engine **260** according to one embodiment of the present invention, the data signals are received by other

5 components (not shown) of the second data communication platform, and then, processed and transmitted out of the second data communication platform by methods known in the art.

The first data communication platform **110** may also be comparing received data signals formatted according to data communication protocols to the data

10 communication protocols stored in the “look-up table” **250** in order to determine if the second data communication platform **140** supports a data signal received by the first data communication platform.

In one embodiment of the present invention of **Fig. 2**, a data signal **200** formatted according to a data communication protocol is sent to the first data

15 communication platform **110** from the network **170** through the data communication port **120**. The processor **230** executes instructions stored in the memory **210**, and the executed instructions operate to receive the data signal **200** formatted according to the data communication protocol. The processor **230** of the first data communication platform **110** determines if the data communication protocol is supported by the first

20 data communication platform **110** by comparing the data communication protocol with data communication protocols which may be pre-stored in the memory **210**. If it is determined that the data communication protocol is supported by the first data communication platform **110**, the processor **230** indicates to the second data

communication platform **140** to receive the data signal **240** at the by-pass path **270** of the filter engine **260** included in the second data communication platform **140**.

The indication may be in the form of the processor **230** tagging header information to the data signal **240**. By tagging the header information to the data signal **240**, the second data communication platform **140** receives the data signal **240** at the by-pass path **270** and routes the data signal **240** through the filter engine **260** to other components (not shown) in the second data communication platform **140**. Once the other components (not shown) of the second data communication platform receives the data signal **240**, which was routed through the by-pass path **270** in accordance with one embodiment of the present invention, the other components (not shown) process and transmit the data signal out of the second data communication platform by methods known in the art, based on the header information, to the network **170** through the data communication port **150**. It should be appreciated by one skilled in the art that tagging the header information to the data signal may be done according to any methods known in the art.

Thus, fast data signal communication capabilities of protocols developed and implemented in ASICs are combined with the flexibility in developing and adding new protocols implemented in software as needed by more complex networked computer devices.

In one embodiment, the processor **230** of the first data communication platform **110** determines if the data communication protocol is supported by the second data communication platform **140** by comparing the data communication protocol with data communication protocols which may be pre-stored in the "look-up table" **250**. If it is

determined that the data communication protocol is supported by the second data communication platform **140**, the processor **230** indicates to the second data communication platform to receive the data signal **240** at the filter path **275** of the filter engine **260** included in the second data communication platform.

5 As discussed above, the indication may be in the form of the processor **230** tagging header information to the data signal **240**. By tagging the header information to the data signal, the second data communication platform **140** receives the data signal **240** at the filter path **275** and filters the data signal **240** through the filter engine **260** to other components (not shown) in the second data communication platform **140**. Once
10 the other components (not shown) of the second data communication platform receives the data signal **240**, which was filtered through the filter path **270** in accordance with one embodiment of the present invention, other components (not shown) process and transmit the data signal out of the second data communication platform by methods known in the art to the network **170** through the data communication port **150**.

15 As a result, fast data signal communication capabilities of protocols developed and implemented in ASICs are combined with the flexibility in developing and adding new protocols implemented in software as needed by more complex networked computer devices.

Figure 3 illustrates an operational flow of one embodiment of the present
20 invention. In **Fig. 1**, a first data communication platform receives a data signal formatted according to a data communication protocol, **310**. The first data communication platform determines if the data communication protocol of the data signal is supported by the first data communication platform, **315**.

If it is determined that the data communication protocol of the data signal is supported by the first data communication platform, the first data communication platform indicates to a second data communication platform to receive the data signal at a by-pass path of a filter engine of the second data communication platform, **320**.

5 The data is received at by-pass path of the filter engine of the second data communication path, **325**, and the data is signal routed through the by-pass path, by-passing the filter engine of the second data communication platform **330**. Once the data signals are received and routed through the by-pass path of the filter engine, according to one embodiment of the present invention, the data signals are received by
10 other components (not shown) of the second data communication platform, and then, processed and transmitted out of the second data communication platform by methods known in the art, **390**.

If it is determined that the data communication protocol of the data signal is not supported by the first data communication platform, **315**, the data signal is received at a
15 filter path of the filter engine of the second data communication platform, **340**. The filter engine filters the data signal by comparing the protocols stored in the “look-up table” and determining if the data signal is formatted according to a data communication protocol that the second data communication platform can support, **345**. Once the data signals are received and routed through the filter path of the filter engine according to
20 one embodiment of the present invention, the data signals are received by other components (not shown) of the second data communication platform, and then, processed and transmitted out of the second data communication platform by methods known in the art, **390**.

In an alternate embodiment, in block, **315**, rather than, and/or in addition to, determining if the data is not supported by the first data communication platform, the first data communication platform determines if the data communication protocol is supported by the second data communication platform. In which case, if it is
5 determined that the data communication protocol is supported by the second data communication platform, the data signal is received at a filter path of the filter engine of the second data communication platform, **340**, and continues through the operational flow. However, if it is determined that the data communication protocol is not supported by the second data communication platform, the first data communication platform
10 determines if the data communication protocol is supported by the first data communication platform as shown in block, **315**, and continues through the operational flows of the embodiment shown in **Fig. 3**.

The operational flow of **Fig. 3** allows for faster data signal communication capabilities of protocols developed and implemented in ASICs to be combined with the
15 flexibility in developing and adding new protocols implemented in software needed by more complex networked computer devices.

Figure 4 illustrates graphical representations of comparing relative performance time lines of the first data communication platform, the second data communication platform, and the combinations of the two types of data communication platforms.

20 In **Fig. 4**, a graph representing a relative performance time line for a first data communication platform **410**, which may be a network processor functioning alone, is shown. The network processor may utilize data communication protocols developed and implemented in software. The relative performance time line for the first data

communication platform **410** shows a relative time indication for receiving a data signal formatted according to a data communication protocol and determining if the data communication protocol is supported by first data communication platform, **411**. The relative performance time line for the first data communication platform **410** also shows the relative time indication for processing and transmitting the data signal, **412**.

In **Fig. 4**, a graph representing a relative performance time line for a second data communication platform **420**, which may be a switch engine functioning alone, is also shown. The switch engine utilizing data communication protocols developed and implemented in ASICs. The relative performance time line for the second data communication platform **430** shows the relative time indication for receiving a data signal formatted according to a data communication protocol at a filter path and filtered, **421**. The relative performance time line for the first data communication platform **420** also shows the relative time indication for processing and transmitting the data signal, **422**.

As illustrated in **Fig. 4**, the relative performance time lines for the first data communication platform **410** and the second data communication platform **420**, each functioning alone, illustrate faster relative performance time lines for the second data communication platform. The processing and transmitting relative time indication **422** of the second data communication platform is relatively faster as well, due in part to the second data communication platform utilizing data communication protocols implemented in ASICs.

Additionally, shown in **Fig. 4** is a graph representing a relative performance time line for a combination of the first data communication platform and the second data

communication platform **430**, in accordance with one embodiment of the present invention. A graph representing an alternate embodiment **440** of the present invention for combining the first data communication platform and the second data communication platform is also shown.

5 For the graphs representing combined platforms **430** and **440**, the relative time indications for determining and indicating to the second data communication platform are similar **411** and are both performed in the first data communication platform. Additionally, the relative time indications for processing and transmitting data signals are similar **422** and are both performed in the second data communication platform.

10 However, the graphs representing combined platforms **430** and **440** include a relative time indication for a by-pass path **432** and a relative time indication for a filter path **441**, both performed in the second data platform.

As illustrated in **Fig. 4**, the relative performance time lines for the combined data communication platforms are relatively faster than the first data communication platform functioning alone **410**. Thus, **Fig 4** graphically illustrates fast data signal communication capabilities of protocols developed and implemented in ASICs combined with flexibility in developing and adding new protocols implemented in software needed as by more complex networked computer devices.

15 **Figure 5** illustrates a computer system **500** upon which an embodiment of the present invention can be implemented. The computer system **500** includes a processor **501** that processes data signals. The processor **501** may be a complex instruction set computer (CISC) microprocessor, a reduced instruction set computing (RISC) microprocessor, a very long instruction word (VLIW) microprocessor, a processor

implementing a combination of instruction sets, or other processor device. **Figure 5** shows an example of the present invention implemented on a single processor computer system **500**. However, it is understood that the present invention may be implemented in a computer system having multiple processors. The processor **501** is coupled to a CPU bus **510** that transmits data signals between processor **501** and other components in the computer system **500**.

The computer system **500** includes a memory **513**. The memory **513** may be a dynamic random access memory (DRAM) device, a synchronous direct random access memory (SDRAM) device, or other memory device. The memory **513** may store instructions and code represented by data signals that may be executed by the processor **501**.

A bridge/memory controller **511** is coupled to the CPU bus **510** and the memory **513**. The bridge/memory controller **511** directs data signals between the processor **501**, the memory **513**, and other components in the computer system **500** and bridges the data signals between the CPU bus **510**, the memory **513**, and a first I/O bus **520**.

The first I/O bus **520** may be a single bus or a combination of multiple buses. As an example, the first I/O bus **520** may comprise a Peripheral Component Interconnect (PCI) bus, a Personal Computer Memory Card International Association (PCMCIA) bus, a NuBus, or other buses. The first I/O bus **520** provides communication links between components in the computer system **500**. A network controller **521** is coupled to the first I/O bus **520**. The network controller **521** links the computer system **500** to a network of computers (not shown) and supports communication among the machines. A display device controller **522** is coupled to the first I/O bus **520**. The display device

controller **522** allows coupling of a display device (not shown) to the computer system **500** and acts as an interface between the display device and the computer system **500**. The display device controller **522** may be a monochrome display adapter (MDA) card, a color graphics adapter (CGA) card, an enhanced graphics adapter (EGA) card, an extended graphics array (XGA) card or other display device controller. The display device (not shown) may be a television set, a computer monitor, a flat panel display or other display device. The display device receives data signals from the processor **501** through the display device controller **522** and displays the information and data signals to the user of the computer system **500**.

A second I/O bus **530** may be a single bus or a combination of multiple buses. As an example, the second I/O bus **530** may comprise a PCI bus, a PCMCIA bus, a NuBus, an Industry Standard Architecture (ISA) bus, or other buses. The second I/O bus **530** provides communication links between components in the computer system **500**. A data storage device **531** is coupled to the second I/O bus **530**. The data storage device **531** may be a hard disk drive, a floppy disk drive, a CD-ROM device, a flash memory device or other mass storage device. A keyboard interface **532** is coupled to the second I/O bus **530**. The keyboard interface **532** may be a keyboard controller or other keyboard interface. The keyboard interface **532** may be a dedicated device or can reside in another device such as a bus controller or other controller. The keyboard interface **532** allows coupling of a keyboard (not shown) to the computer system **500** and transmits data signals from a keyboard to the computer system **500**. An audio controller **533** is coupled to the second I/O bus **530**. The audio controller **533** operates to coordinate the recording and playing of sounds.

A bus bridge **524** couples the first I/O bus **520** to the second I/O bus **530**. The bus bridge **524** operates to buffer and bridge data signals between the first I/O bus **520** and the second I/O bus **530**.

In one embodiment, the first and second data communication platforms are implemented as network controller **521** to link the computer system **500** to a network of computer devices (not shown) and support fast data signal communication capabilities of protocols, developed and implemented in ASICs, combined with the flexibility in developing and adding new protocols implemented in software needed by more complex networked computer devices.

Thus, a method and apparatus for combining fast data signal communication capabilities of protocols developed and implemented as ASICs with the flexibility in developing and adding new protocols implemented as software needed by more complex networked computer devices is described.

Whereas many alterations and modifications of the present invention will be comprehended by one skilled in the art after having read the foregoing description, it is to be understood that the particular embodiments shown and described by way of illustration are in no way intended to be considered limiting. Therefore, references to details for particular embodiments are not intended to limit the scope of the claims.

CLAIMS

What is claimed is:

- 1 1. A method comprising:
 - 2 receiving a data signal formatted according to a data communication protocol at
 - 3 a first data communication platform;
 - 4 determining if the data communication protocol is supported by the first data
 - 5 communication platform; and
 - 6 indicating to a second data communication platform to receive the data signal at
 - 7 a by-pass path of a filter engine of the second data communication platform if it is
 - 8 determined that the data communication protocol is supported by the first data
 - 9 communication platform.
- 1 2. The method of claim 1, wherein the data signal is a first data signal and the data
 - 2 communication protocol is a first data communication protocol, the method of claim 1
 - 3 further comprising:
 - 4 receiving a second data signal formatted according to a second data
 - 5 communication protocol at the first data communication platform;
 - 6 determining if the second data communication protocol is supported by the
 - 7 second data communication platform; and

a second data communication platform, coupled to the first data communication platform, to receive an indication for receiving the data signal at a by-pass path of a filter engine of the second data communication platform if it is determined that the data communication protocol is supported by the first data communication platform.

8. The apparatus of claim 7, wherein said first data communication platform comprises a network processor, the network processor implemented in software.

9. The apparatus of claim 7, wherein said second data communication platform comprises a network switch engine, the network switch engine implemented in application specific integrated circuits (ASICs).

10. An article comprising:
a storage medium having stored therein a plurality of instructions that are machine executable, wherein when executed, said executing instructions operate to receive a data signal formatted according to a data communication protocol at a first data communication platform, determine if the data communication protocol is supported by the first data communication platform, and indicate to a second data communication platform to receive the data signal at a by-pass path of a filter engine of the second data communication platform if it is determined that the data communication protocol is supported by the first data communication platform.

1 15. The article of claim 10, wherein said executing instructions operate to indicate to
2 a network switch engine, the network switch engine implemented in application specific
3 integrated circuits (ASICs).

1 16. An apparatus comprising:
2 a storage medium having stored therein a plurality of instructions that are
3 machine executable, wherein when executed, said executing instructions operate to
4 receive a data signal formatted according to a data communication protocol at a first
5 data communication platform, determine if the data communication protocol is
6 supported by the first data communication platform, and indicate to a second data
7 communication platform to receive the data signal at a by-pass path of a filter engine of
8 the second data communication platform if it is determined that the data communication
9 protocol is supported by the first data communication platform; and
10 a processor coupled to the storage medium to execute the instructions.

1 17. The apparatus of claim 16, wherein the data signal is a first data signal and the
2 data communication protocol is a first data communication protocol, the apparatus of
3 claim 16, wherein said executing instructions further operate to receive a second data
4 signal formatted according to a second data communication protocol at the first data
5 communication platform, determine if the second data communication protocol is
6 supported by the second data communication platform, and indicate to the second
7 communication platform to receive the data signal at a filter engine path of the filter

ABSTRACT OF THE DISCLOSURE

Two data communication platforms are operating as a combination. In one embodiment, a data signal formatted according to a data communication protocol is received at a first data communication platform. The first data communication platform operates to determine if the data communication protocol is supported by the first data communication platform. If it is determined that the data communication protocol is supported by the first data communication platform, the first data communication platform indicates to a second data communication platform to receive the data signal at a by-pass path of a filter engine. As a result, fast data signal communication capabilities of protocols developed and implemented as ASICs are combined with the flexibility in developing and adding new protocols implemented as software needed by more complex networked computer devices. In one embodiment, a second data signal formatted according to a second data communication protocol is received at the first data communication platform. The first data communication platform operates to determine if the second data communication protocol is supported by the second data communication platform. If it is determined that the data communication protocol is supported by the second data communication platform, the first data communication platform indicates to the second communication platform to receive the data signal at a filter engine path of the filter engine.

FIG. 1

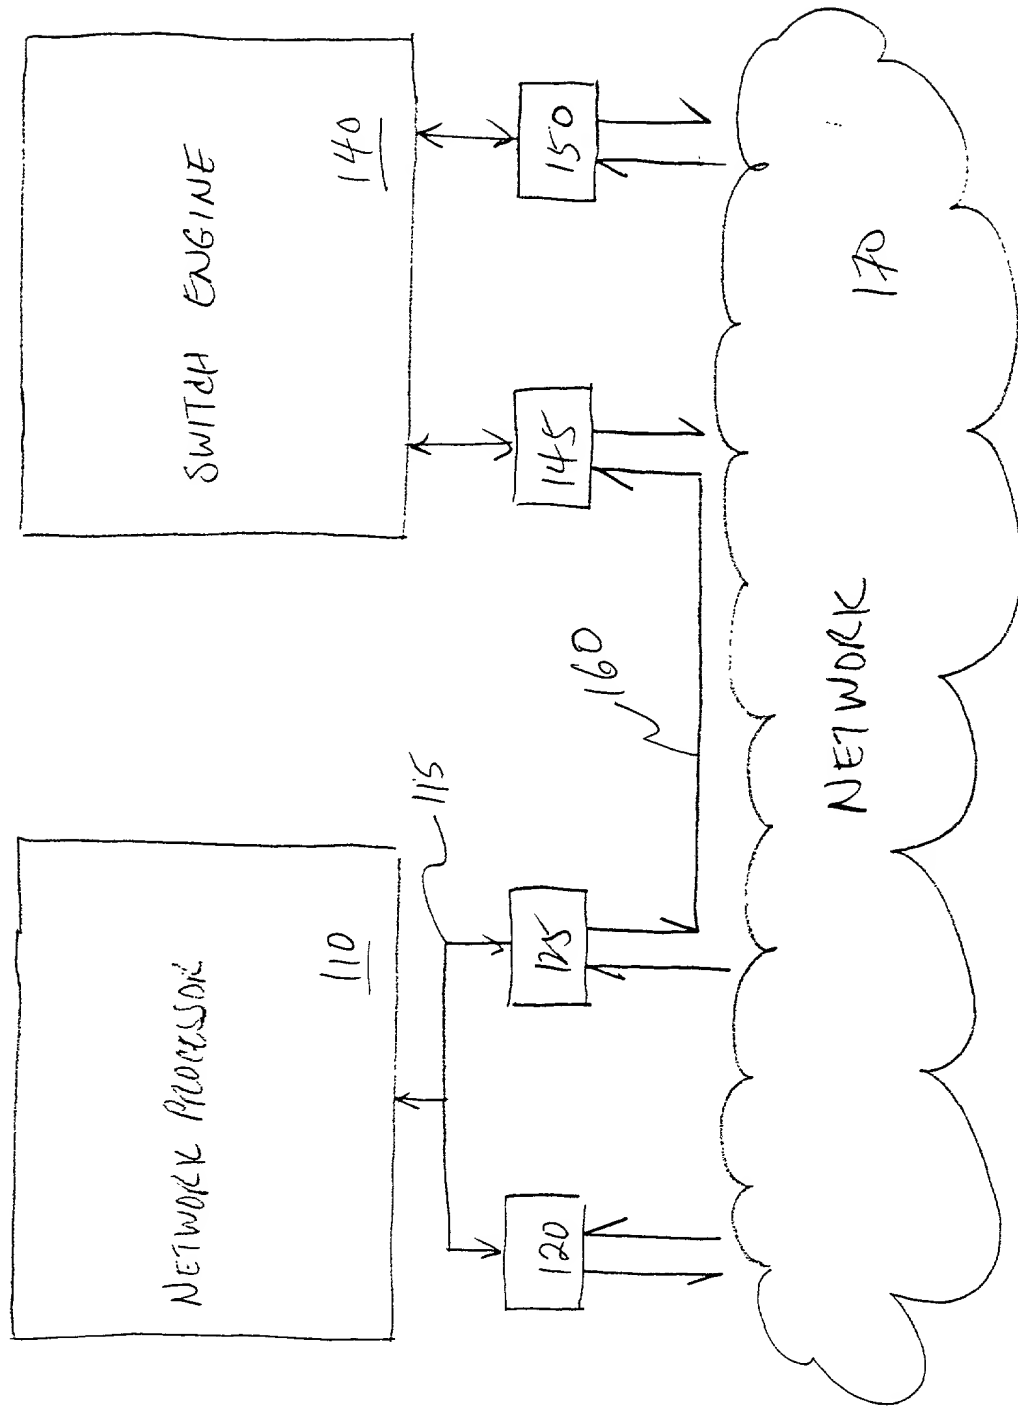
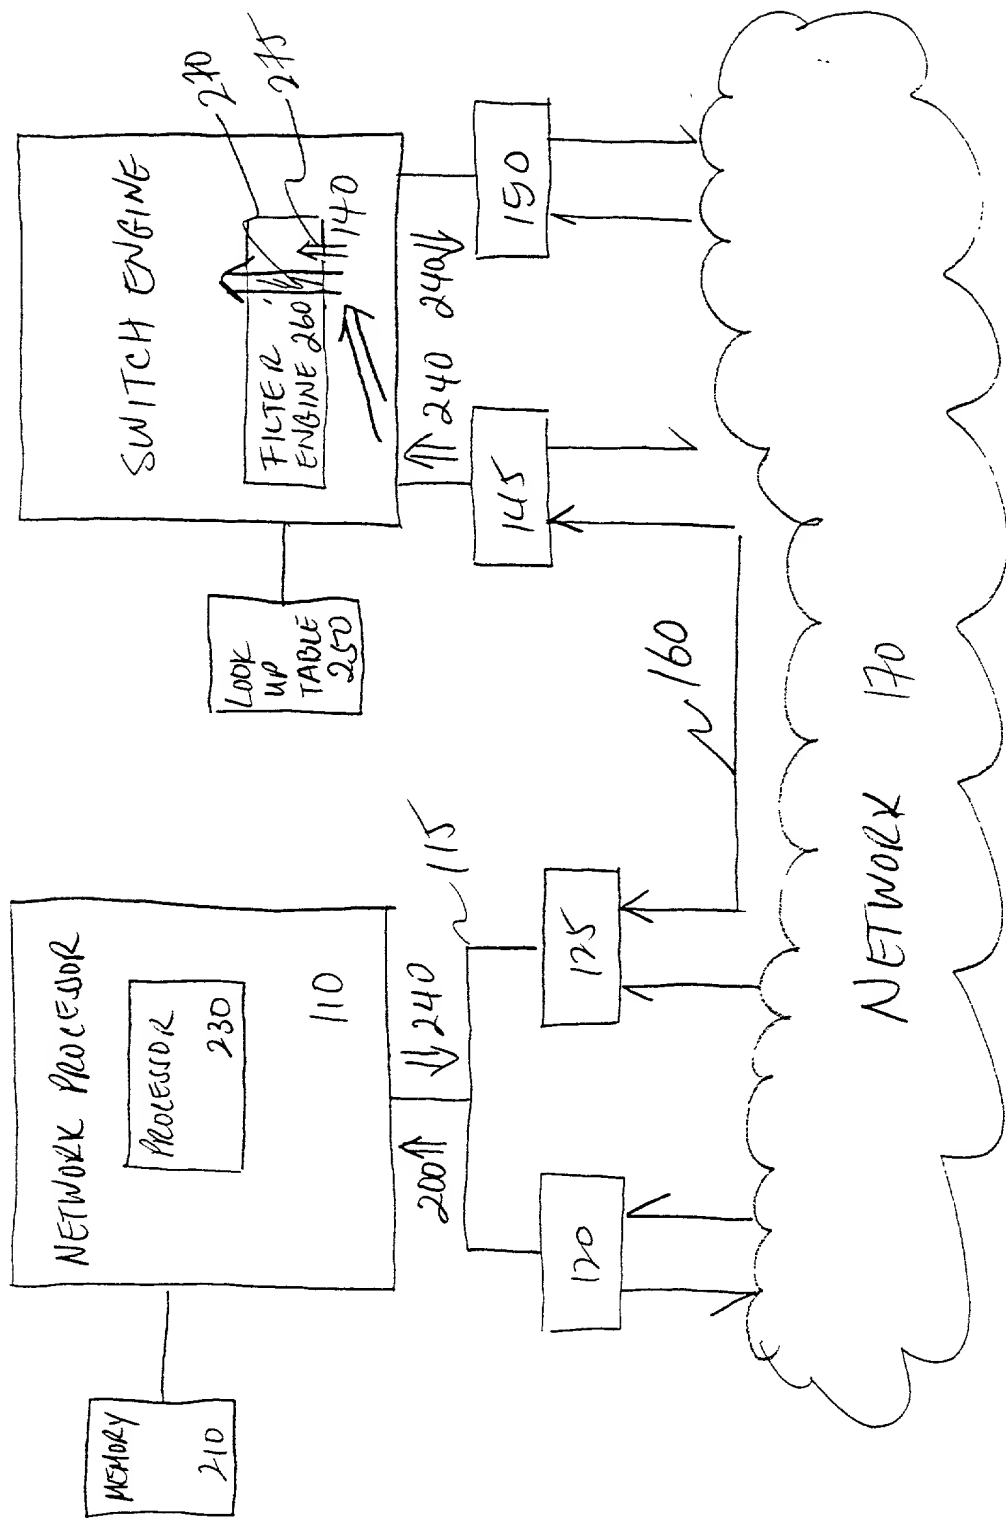


FIG. 2




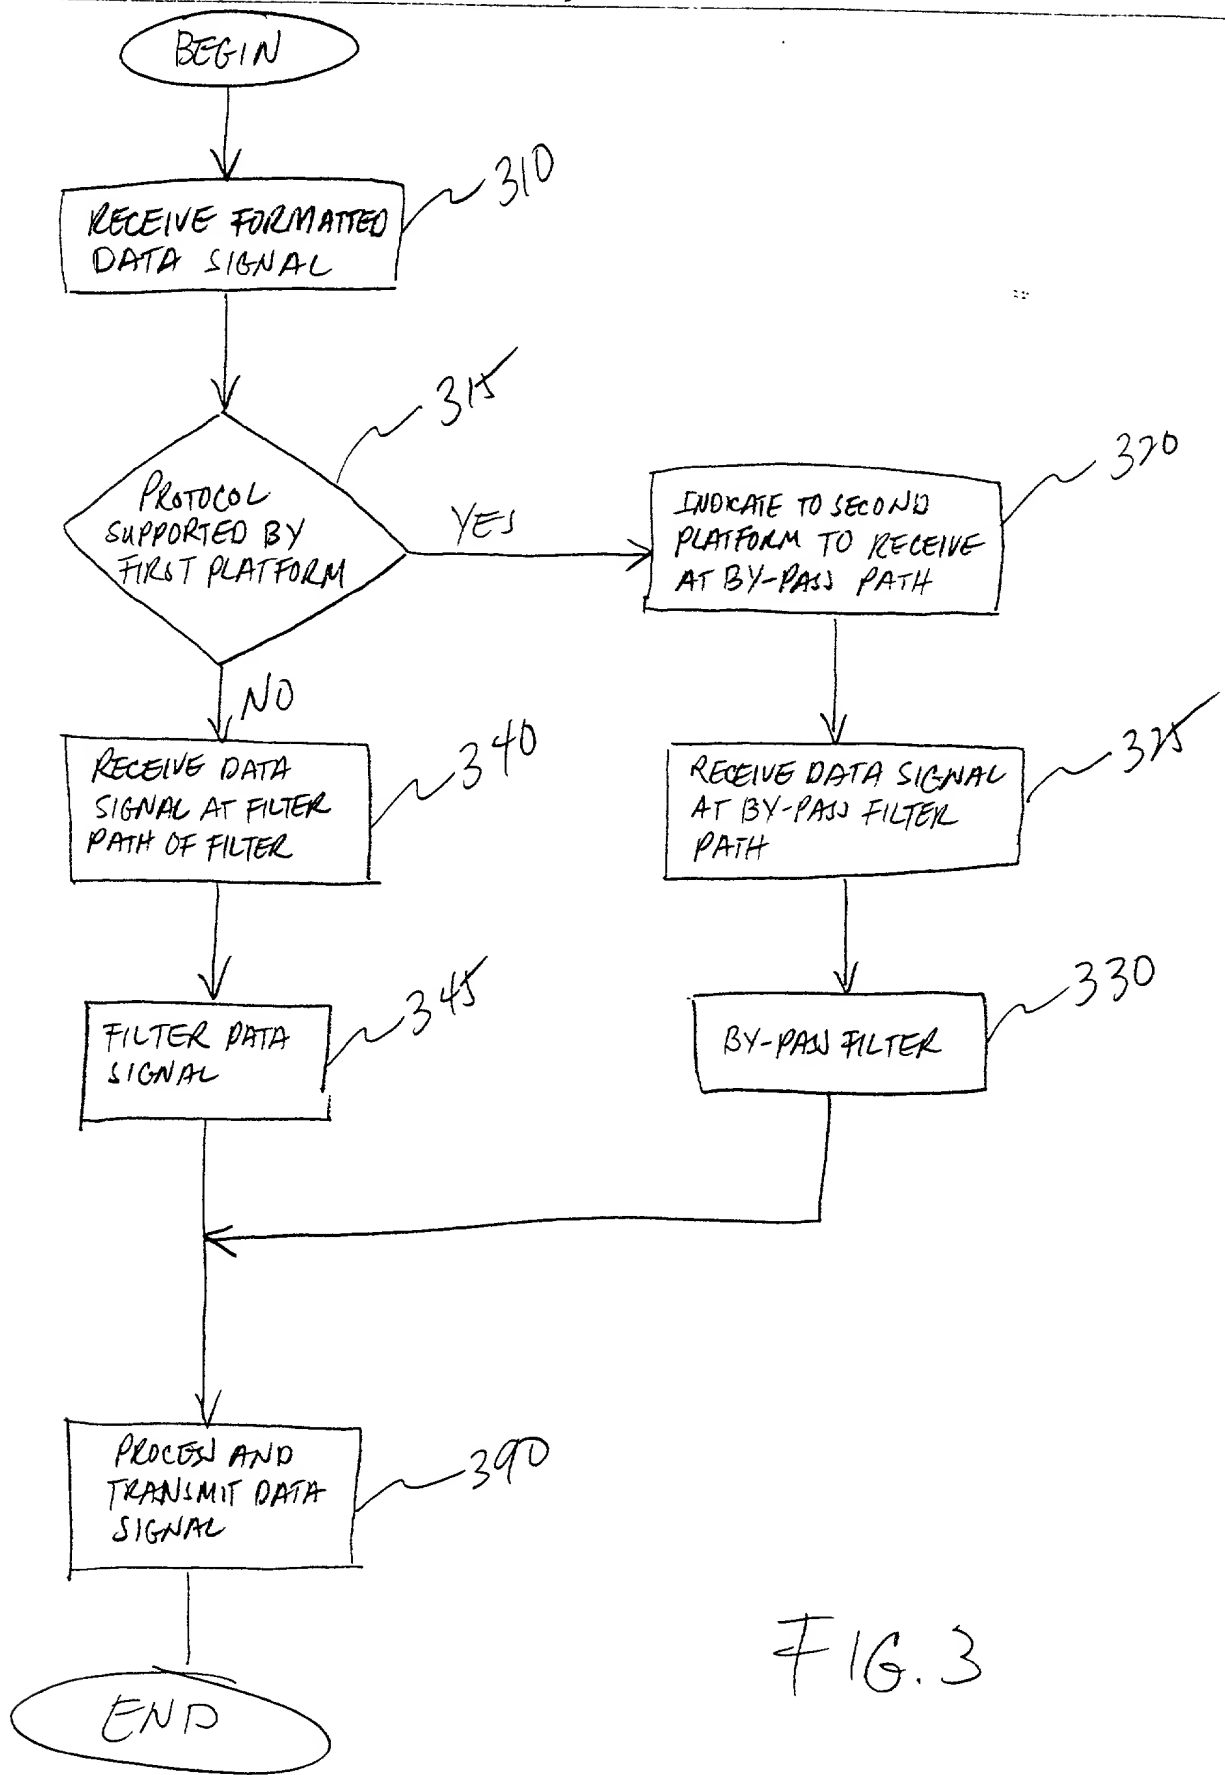


FIG. 3

FIG. 4

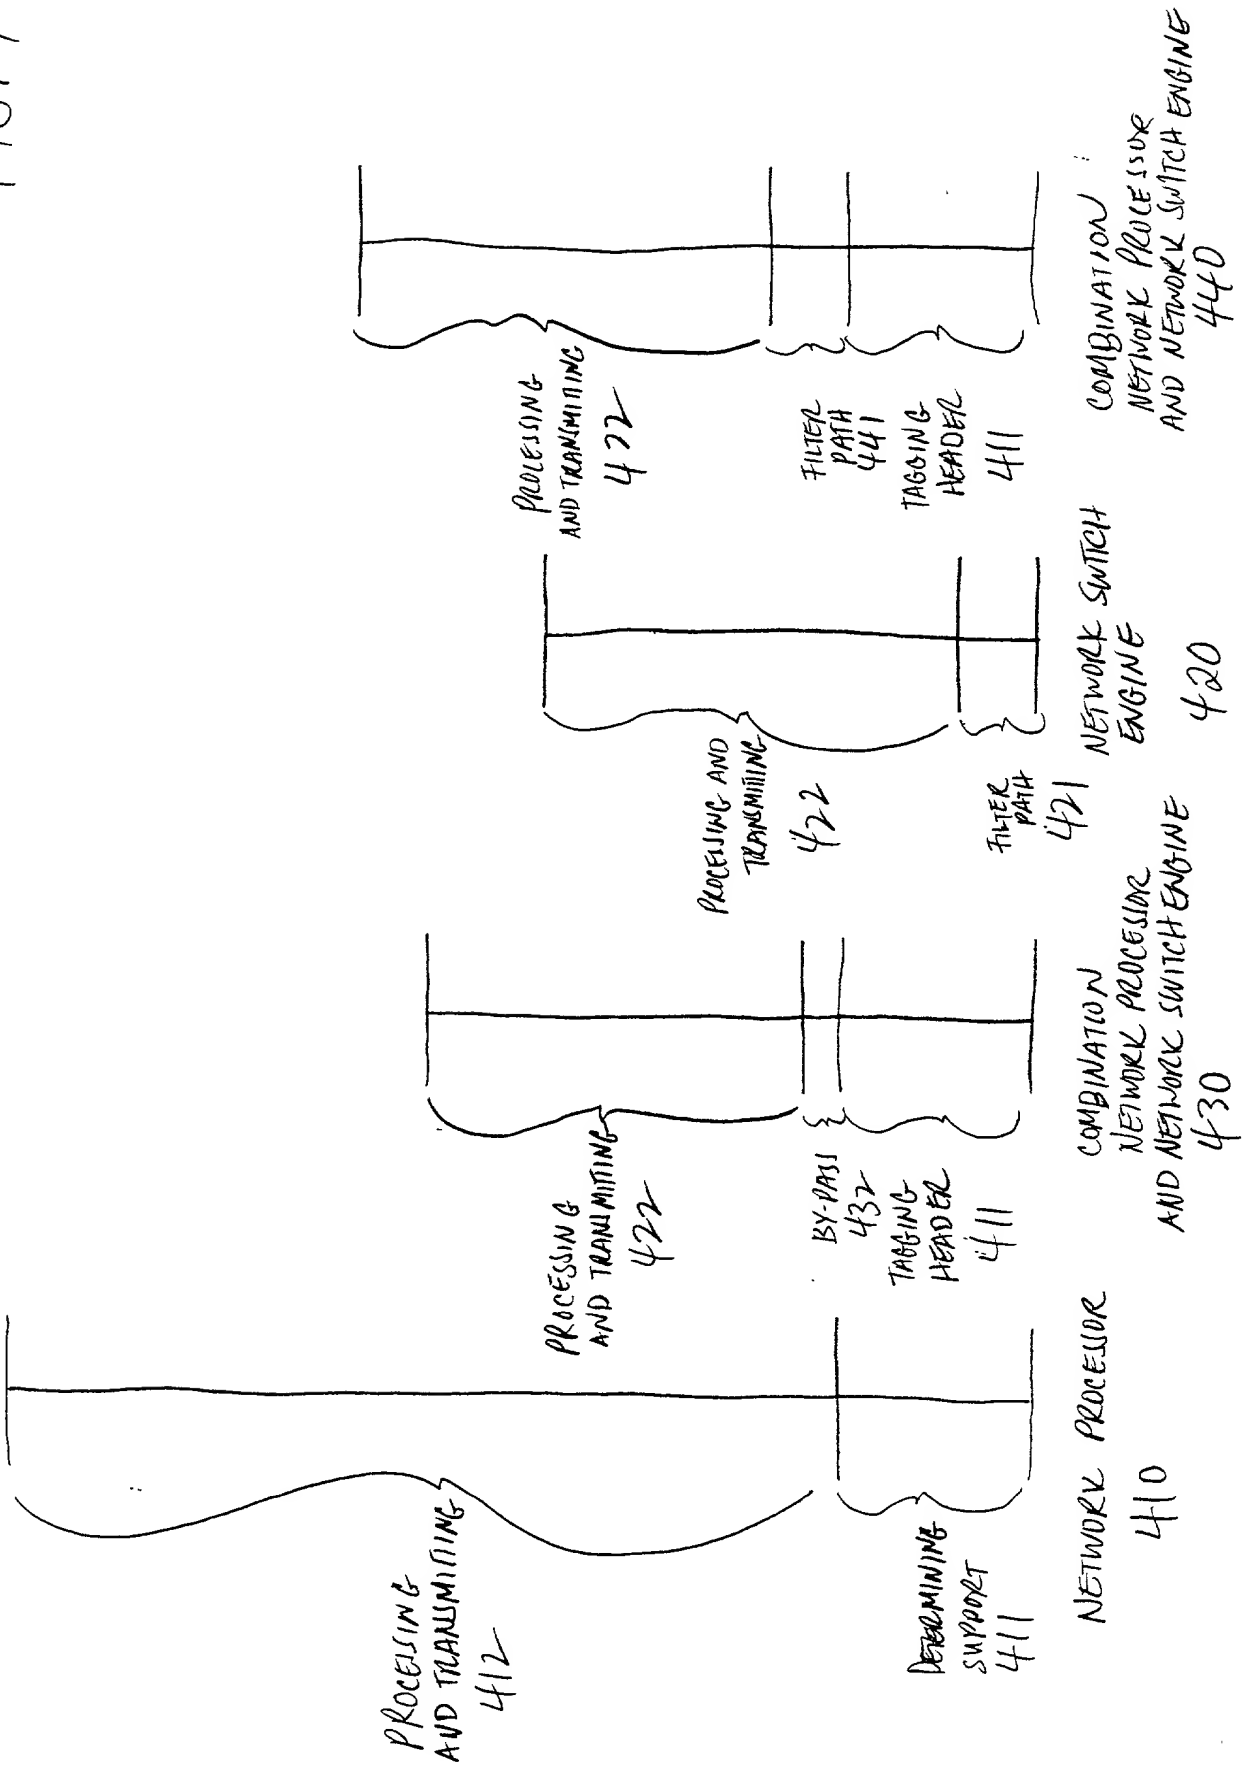

PROCESSOR
501

500

CPU BUS 510

BRIDGE/MEMORY
CONTROLLER
511

MEMORY
513

BUS 520

NETWORK
CONTROLLER
521

DISPLAY DEVICE
CONTROLLER
522

BUS BRIDGE
524

BUS 530

DATA STORAGE
531

KEY BOARD
INTERFACE
532

AUDIO
CONTROLLER
533

FIG. 5

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION (FOR INTEL CORPORATION PATENT APPLICATIONS)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR FLEXIBLE HIGH SPEED COMMUNICATION

the specification of which

☒

is attached hereto.

☐ was filed on _____ as _____

United States Application Number _____

or PCT International Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

APPLICATION NUMBER	COUNTRY (OR INDICATE IF PCT)	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NUMBER	FILING DATE	STATUS (ISSUED, PENDING, ABANDONED)

I hereby appoint the persons listed on Appendix A hereto (which is incorporated by reference and a part of this document) as my respective patent attorneys and patent agents, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to:

Aloysius T.C. AuYeung, Reg. No. 35,432, BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, LLP

(Name of Attorney or Agent)

12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025 and direct telephone calls to:

Aloysius T.C. AuYeung, (503) 684-6200.

(Name of Attorney or Agent)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor (given name, family name)

Aly Aarestrup Michaelsen

Inventor's Signature _____

Date _____

Residence Farum, Denmark

(City, State)

Citizenship Denmark

(Country)

P. O. Address Lindegaardsvej 13 B

Farum, 2760 Denmark

APPENDIX A

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, a firm including: William E. Alford, Reg. No. 37,764; Farzad E. Amini, Reg. No. 42,261; Amy M. Armstrong, Reg. No. 42,265; Aloysius T. C. AuYeung, Reg. No. 35,432; William Thomas Babbitt, Reg. No. 39,591; Carol F. Barry, Reg. No. 41,600; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Bereznak, Reg. No. 33,474; Michael A. Bernadicon, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; R. Alan Burnett, Reg. No. 46,149; Gregory D. Caldwell, Reg. No. 39,926; Ronald C. Card, Reg. No. 44,587; Thomas M. Coester, Reg. No. 39,637; Donna Jo Coningsby, Reg. No. 41,684; Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Robert Andrew Diehl, Reg. No. 40,992; Matthew C. Fagan, Reg. No. 37,542; Tarek N. Fahmi, Reg. No. 41,402; George L. Fountain, Reg. No. 36,374; Paramita Ghosh, Reg. No. 42,806; James Y. Go, Reg. No. 40,621; James A. Henry, Reg. No. 41,064; Willmore F. Holbrow III, Reg. No. 41,845; Sheryl Sue Holloway, Reg. No. 37,850; George W. Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; William W. Kidd, Reg. No. 31,772; Sang Hui Kim, Reg. No. 40,450; Walter T. Kim, Reg. No. 42,731; Eric T. King, Reg. No. 44,188; Erica W. Kuo, Reg. No. 42,775; Joseph Lutz, Reg. No. 43,765; Michael J. Mallie, Reg. No. 36,591; Paul A. Mendonsa, Reg. No. 42,879; Clive D. Menezes, Reg. No. 45,493; Darren J. Milliken, Reg. No. 42,004; Chun M. Ng, Reg. No. 36,878; Thien T. Nguyen, Reg. No. 43,835; Thinh V. Nguyen, Reg. No. 42,034; Dennis A. Nicholls, Reg. No. 42,036; Lisa A. Norris, Reg. No. 44,976; Daniel E. Ovanezian, Reg. No. 41,236; William F. Ryann, Reg. No. 44,313; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Jeffrey S. Smith, Reg. No. 39,377; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Judith A. Szepesi, Reg. No. 39,393; Vincent P. Tassinari, Reg. No. 42,179; Edwin H. Taylor, Reg. No. 25,129; Joseph A. Twarowski, Reg. No. 42,191; Lester J. Vincent, Reg. No. 31,460; Glenn E. Von Tersch, Reg. No. 41,364; John Patrick Ward, Reg. No. 40,216; Charles T. J. Weigell, Reg. No. 43,398; James M. Wu, Reg. No. 45,241; Steven D. Yates, Reg. No. 42,242; and Norman Zafman, Reg. No. 26,250; my attorneys; and Andrew C. Chen, Reg. No. 43,544; Justin M. Dillon, Reg. No. 42,486; and John F. Travis, Reg. No. 43,203; my patent agents, of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (714) 557-3800, and Alan K. Aldous, Reg. No. 31,905; Robert D. Anderson, Reg. No. 33,826; Joseph R. Bond, Reg. No. 36,458; Richard C. Calderwood, Reg. No. 35,468; Jeffrey S. Draeger, Reg. No. 41,000; Cynthia Thomas Faatz, Reg. No. 39,973; Sean Fitzgerald, Reg. No. 32,027; John N. Greaves, Reg. No. 40,362; Seth Z. Kalson, Reg. No. 40,670; David J. Kaplan, Reg. No. 41,105; Charles A. Mirho, Reg. No. 41,199; Leo V. Novakoski, Reg. No. 37,198; Naomi Obinata, Reg. No. 39,320; Thomas C. Reynolds, Reg. No. 32,488; Kenneth M. Seddon, Reg. No. 43,105; Mark Seeley, Reg. No. 32,299; Steven P. Skabrat, Reg. No. 36,279; Howard A. Skaist, Reg. No. 36,008; Steven C. Stewart, Reg. No. 33,555; Raymond J. Werner, Reg. No. 34,752; Robert G. Winkle, Reg. No. 37,474; and Charles K. Young, Reg. No. 39,435; my patent attorneys, and Thomas Raleigh Lane, Reg. No. 42,781; Calvin E. Wells, Reg. No. P43,256; Peter Lam, Reg. No. 44,855; and Gene I. Su, Reg. No. 45,140; my patent agents, of INTEL CORPORATION; and James R. Thein, Reg. No. 31,710, my patent attorney; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.